


Brass drain valves are used at the lowest point of a pressure tank to condensate drain. Today they are generally used as a vent valve.

Material: Brass
 Sealant: NBR
 Operating pressure: Max. 25.0 bar
 Operating temperature: 0 °C to 90 °C
 Mounting position: any position

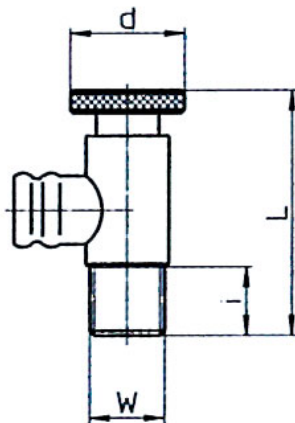

223.20

Drain valves, angle type, with hose fitting (for hose inside width 12 mm) and knurled screw

Art. No.	Ident No.	Port W	DN	L	i	d	a/f
223.10	103739	G 1/8	5	43.5	8.5	20.0	-
223.20	103740	G 1/4	5	43.5	13.0	20.0	-